


ICE PRODUCTION OF 40 TONS/DAY

QUALTY ICE FROM THE ICELINGS P35 TUBE-ICE MACHINE IS TRANSPORTED EFFICIENTLY TO DUR BULK ICE STORAGE BIN BY DUR SCREW CONVEYOR SYSTEM. ICE IS FED DIRECTLY FROM THE BIN BY THE BAGGER WHERE A MEASURED VOLUME OF ICE IS AUTOMATICALLY DISPENSED INTO AN OPEN POLY ICE BAG. AN OPERATOR SIMPLY TRANFERS THE POLY BAG OF ICE TO THE BAG SEALER TO WHERE IT IS SECURELY SEALED. THE BELT CONVEYOR CONVENIENTLY CARRIES THE FINISHED BAG OF ICE AWAY TO THE SECOND OPERATOR WHO REMOVES IT FROM THE BELT CONVEYOR AND PLACES IT ON A PALLET. THE FULL PALLET OF ICE IS TRANSFERRED TO THE COLD STORAGE OR DIRECTLY INTO THE DELIVERY TRUCK.

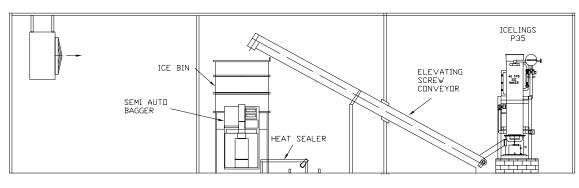

APPROX. PLANT AREA REQUIRED = 1500 sq. ft

ALL DIMENSIONS. ARE IN FEET

CLIENT :	FRICK INDIA				
CONSULTA	NTS : CHIRAG ICE FACTORY PVT LTD				
SCALE TRUE SCALE QTY. 1 NO	40 TON PLANT LAYOUT	DRG. NO CHRG/LA SHEET	YOUT/	JAN02,	/08-09
	HIRAG ICE FACTORY PVT.LTD. NUFACTURER OF REFRIGRN & ENGG EQPT	REV.	0	1	
ICELINGS D-		DATE	06.01.09		
	29/12,TURBHE MIDC,NAVI MUMBAI -400 705. L:- 91-22-2763 1378/6513 1986 X-2761 4801(EXTN. 22) E-MAIL:RUSTOM@ICELINGS.COM	PREPARED	NKJ		
		CHECKED	TST		
		APPROVED	RI		